

DTT

Digital Time / Date Titler

Operation Manual

NTSC Format 12 Hour Time(24AC)

Programming

The **DTT** is programmed by sequencing through the prompts with the **Select** button, then altering the on-screen information using the **Up** and **Down** buttons. When a portion of the on-screen information is selected, it will flash; this indicates that it may be altered using the **Up** and **Down** buttons.

- 1) Press the **Select** button to begin programming. The **Setup** indicator (**Yellow LED**) will light, and the first character of the 20 character titler will begin flashing.
- 2) Use the **Up** and **Down** buttons to scroll through the available characters.
- 3) When the desired character is displayed, select it by pressing the **Select** button. This will set the selected character and move the cursor to the next character to the right.
- 4) Repeat the above steps until all characters have been set as desired.
- 5) To return to a previously set character, press and hold the **Select** button and use the **Down** button to sequence in reverse order.
- 6) When the on-screen information is set as desired, press the **Select** button to exit the program mode. This will cause the **Setup** indicator (**Yellow LED**) to turn off.
- 7) The on-screen information may be placed in any vertical position simply by pressing the **Up** and **Down** buttons. The display cannot be moved horizontally.

Display Format

The on-screen information consists of two lines;


Line 1 contains 20 characters of titling

Line 2 contains month, date, year, hours, minutes, seconds (AM/PM).

ABCDEFGHIJKLMN OPQRST
MMM-DD-YY HH:MM:SS A

Legend

- A-T:** 20 characters of titling
DD: Date (i.e. 1-31)
MMM: Month (e.g., JAN, FEB)
YY: Year (e.g., 99, 00, 01, 02)
HH: Hours (1-12)
MM: Minutes (00-59)
SS: Seconds (00-59)
-: Power Failure Indicator

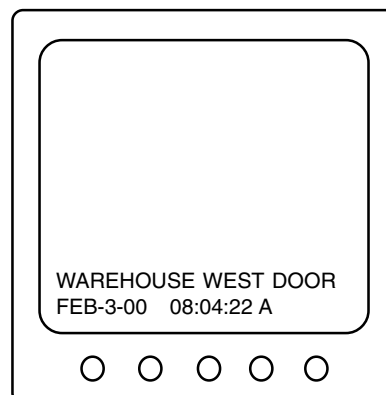

Video

The **DTT** will pass video through even when the power fails or is intentionally interrupted. This unit works with both monochrome and color signals with no signal degradation.

Power Failure Indicator

An interruption in the **DTT** power supply is indicated by a dash (-) on the display, after the seconds indicator. If power has failed at any time, the dash will appear, and will remain on-screen until cleared. It is cleared by resetting the time.

Note: The Power Failure Indicator will appear when the unit is powered-up for the first time, but will clear once the proper time has been set. If the power has failed and the back-up capacitor has discharged completely, the **Power** indicator (Green LED) will flash, prompting you to set the correct time.

Specifications

Video

Video Input / Output BNC - 2 passive video loop-through
Video Format NTSC/ EIA 1 Volt P-P, 75 ohm termination

Display

Titler Format 20 Alpha-Numeric Character
Date-Time Format MMM-DD-YY HH:MM:SS A(A-AM,P-PM)
Clock Accuracy 5ppm
On-Screen Width 75% of active display width
Character Height 18 lines (5.8% of total image height)

Control / Programming

Control Interface 3 Front Panel Buttons: Select, Up, and Down
Status Indicators 2 front Panel LEDs: Power(Green), Setup(Yellow)

Back-Up Battery

90 days internal, rechargeable NiCd battery

Size / Weight / Power

Size 3 3/8" D x 2 5/8" W x 1 1/8" H
 85mm D x 62mm W x 30mm H
Weight 12 oz / .34 Kg
Power 7 - 24 VAC @ 32 mA
 2.1mm x 5.5mm DC Power Connector
 Center Positive



Warranty

1 year parts and labor